

# STATIC AND VIBRATION ANALYSES OF GENERAL WING STRUCTURES USING EQUIVALENT PLATE MODELS

Rakesh K. Kapania\* and Youhua Liu\*\*

Virginia Polytechnic Institute and State University

Blacksburg, VA 24061

## Abstract

An efficient method, using equivalent plate model, is developed for studying the static and vibration analyses of general built-up wing structures composed of skins, spars, and ribs. The model includes the transverse shear effects by treating the built-up wing as a plate following the Reissner-Mindlin theory, the so-called First-order Shear Deformation Theory (FSDT). The Ritz method is used with the Legendre polynomials being employed as the trial functions. This is in contrast to previous equivalent plate model methods which have used simple polynomials, known to be prone to numerical ill-conditioning, as the trial functions. The present developments are evaluated by comparing the results with those obtained using MSC/NASTRAN, for a set of examples. These examples are: (i) free-vibration analysis of a clamped trapezoidal plate with (a) uniform thickness, and (b) non-uniform thickness varying as an airfoil, (ii) free-vibration and static analyses (including skin stress distribution) of a general built-up wing, and (iii) free-vibration and static analyses of a swept-back box wing. The results obtained by the present equivalent plate model are in good agreement with those obtained by the finite element method.

---

\*: Professor, Department of Aerospace and Ocean Engineering, Associate Fellow AIAA

\*\* : Research Assistant, Department of Aerospace and Ocean Engineering, Student member AIAA

## Introduction

For structural analysis, the Finite Element Analysis (FEA) is widely used because of its generality, versatility and reliability. FEA is also the method of choice in situations where detailed results in the vicinity of local discontinuities (holes, abrupt dimension variations etc.) are needed. This is accomplished by refinement of the mesh near the zone of interest. But a wide application of detailed FEA at the late conceptual design stage or in the early preliminary design stage still faces some major obstacles. First, the preparation time for a FEA model data may be prohibitive, especially when there is little carry-over from design to design. Second, for complex structures, a detailed FEA needs huge amount of CPU time and computation capacity which makes the cost soar.

In view of this situation, often equivalent continuum models are used to simulate complex structures for the purpose of obtaining global solutions in the early design stages. This idea is reasonable as long as the complex structure behaves physically in a close manner to the continuum model used and only global quantities of the response are of concern. For example, significant work exists on using beam or plate models to simulate repetitive lattice structures<sup>1-7</sup>.

In the area of analyzing aerospace wing structures, a number of studies have been conducted on using equivalent beam models to represent simple box-wings composed of laminated or anisotropic materials<sup>8-10</sup>, and they have yielded accurate results for the specific problems studied. But from a realistic point of view, using an equivalent plate to model a wing structure is more promising, since a wing, especially the one that has a low aspect ratio, is likely to behave more as a plate than as a beam.

There does exist a considerable body of work on the static or dynamic behaviors of all kinds of plates. A thorough description of literature on the study of plates was given by Lovejoy and Kapania<sup>11</sup>, where more than 300 references has been listed about all kinds of thin, thick, laminated or composite plates of trapezoidal shapes. One way of classifying existing methods for the solution of plates is according to the

deformation theory used, namely: the Classical Plate Theory (CPT), the First-order Shear Deformation Theory (FSDT), or the Higher-order Shear Deformation Theory (HSDT) etc. The CPT is based on the Kirchhoff-Love hypothesis, that is, a straight line normal to the plate middle surface remains straight and normal during the deformation process. This group of theories work well for truly thin isotropic plates, but for thick isotropic plates and for thin laminated plates they tend to overestimate the stiffness of the plate since the effects of through-the-thickness shear deformation are ignored<sup>12,13</sup>. The FSDT is based on the Reissner-Mindlin model<sup>14,15</sup>, where the constraint that a normal to the mid-surface remains normal to the mid-surface after deformation is relaxed, and a uniform transverse shear strain is allowed. The FSDT is the most widely used theory for thick and anisotropic laminated plates owing to its simplicity and its low requirement for computation capacity. For more accurate results or more realistic local distributions of the transverse strain and stress, one should use the HSDT<sup>16</sup>, or the CFSDT (Consistent First-order Shear Deformation Theory) proposed by Knight and Qi<sup>17</sup>.

Methods of solving the CPT, FSDT or HSDT mainly include finite element, Galerkin, and Rayleigh-Ritz methods<sup>11</sup>. In the context of using equivalent plate to represent the behaviors of wing structures at the conceptual stage at least, it is obvious that while the computationally costly finite element method is to be avoided, the Rayleigh-Ritz method is attractive.

There have been several studies using equivalent plate models to model wing structures. Giles<sup>18,19</sup> developed a Ritz method based approach, which considers an aircraft wing as being formed by a series of equivalent trapezoidal segments, and represents the true internal structure of aircraft wings in the polynomial power form. In Giles<sup>18</sup> the CPT was used, but this shortcoming was removed subsequently<sup>19</sup>. Tizzi<sup>20</sup> presented a method whose many aspects are similar to that of Giles. In Tizzi's work several trapezoidal segments in different planes can be considered, but the internal parts of wing structures (spars, ribs, etc.) were not considered. Livne<sup>21</sup> formulated the FSDT to be used for modeling solid plates as well

as typical wing box structures made of cover skins and an array of spars and ribs based on simple-polynomial trial functions, which are known to be prone to numerical ill-conditioning problems. Livne and Navarro then further developed the method to deal with nonlinear problems of wing box structures<sup>22</sup>.

The present study is an extension of the previous works of Kapania and Singhvi<sup>23,24</sup>, Kapania and Lovejoy<sup>25,26,11</sup> and Cortial<sup>27</sup>, who all used the Rayleigh-Ritz method with the Chebyshev polynomials as the trial functions, and applied the Lagrange's equations to obtain the stiffness and mass matrices. In Kapania and Singhvi<sup>23,24</sup>, the CPT was used to solve generally laminated trapezoidal plates, while in Kapania and Lovejoy<sup>25,26,11</sup>, the FSDT was used. In all these studies, only uniform plates were considered. In Cortial<sup>27</sup>, efforts were made to use the method of Kapania and Lovejoy<sup>25,26,11</sup> to calculate natural frequencies of box-wing structures, but an assumption of constant wing thickness makes it difficult to apply the method to general wing structures.

In this paper, it is assumed that the wing plan-form is trapezoidal, and the wing structure is composed of skins, spars and ribs. The wing is represented as an equivalent plate model, and the Reissner-Mindlin displacement field model is used. The Rayleigh-Ritz method is applied to solve the resulting equivalent plate problem, with the Legendre polynomials being used as the trial functions. After the stiffness matrix and mass matrix are determined by applying the Lagrange's equations, static analysis can be readily performed and the natural frequencies and mode shapes of the wing can be obtained by solving an eigenvalue problem. Formulations are such that no limitation is placed on the wing thickness distribution as was the case in Cortial<sup>27</sup>. As examples of verifying the present method, a wing-shaped plate, a wing-shaped plate with camber, a solid wing and a built-up wing are analyzed respectively and the results are compared with those obtained from a detailed FE analysis using MSC/NASTRAN.

## Assumptions and Formulations

For the solution of a plate under static or dynamic deformation, the Reissner-Mindlin method, a First-order Shear Deformation Theory (FSDT), is based on two assumptions for the displacement field: (1) A normal line to the non-deformed middle surface remains a straight line after deformation; and (2) The transverse normal stress can be neglected in the constitutive relations.

According to these assumptions, and assuming linearity, the displacement field of the plate is given as:

$$\left. \begin{aligned} u(x, y, z, t) &= u_0(x, y, t) + z\phi_x(x, y, t) \\ v(x, y, z, t) &= v_0(x, y, t) + z\phi_y(x, y, t) \\ w(x, y, z, t) &= w_0(x, y, t) \end{aligned} \right\} \quad (1)$$

where as shown in Fig. 1,  $u, v, w$  are displacements in the  $x, y, z$  direction respectively, subscript 0 refers to quantities associated with the plane  $z = 0$ ,  $\phi_x$  and  $\phi_y$  are the rotations about the  $y$  and  $-x$  axis respectively. It is assumed here that the middle surface of the plate is without or with a very small curvature, therefore  $z = 0$  can be considered to be the middle surface.

From (1) we can get the strains:

$$\left. \begin{aligned} \varepsilon_x &= \frac{\partial u}{\partial x} = \frac{\partial u_0}{\partial x} + z \frac{\partial \phi_x}{\partial x} \\ \varepsilon_y &= \frac{\partial v}{\partial y} = \frac{\partial v_0}{\partial y} + z \frac{\partial \phi_y}{\partial y} \\ \varepsilon_z &= \frac{\partial w}{\partial z} = 0 \\ \gamma_{xy} = 2\varepsilon_{xy} &= \frac{\partial u}{\partial y} + \frac{\partial v}{\partial x} = \frac{\partial u_0}{\partial y} + \frac{\partial v_0}{\partial x} + z \left( \frac{\partial \phi_x}{\partial y} + \frac{\partial \phi_y}{\partial x} \right) \\ \gamma_{yz} = 2\varepsilon_{yz} &= \frac{\partial v}{\partial z} + \frac{\partial w}{\partial y} = \phi_y + \frac{\partial w_0}{\partial y} \\ \gamma_{zx} = 2\varepsilon_{zx} &= \frac{\partial w}{\partial x} + \frac{\partial u}{\partial z} = \phi_x + \frac{\partial w_0}{\partial x} \end{aligned} \right\} \quad (2)$$

Now we want to analyze a wing by assuming that it behaves as a plate. This assumption is very reasonable as long as the wing has a small thickness-chord ratio. For the convenience of calculation, a

transformation from  $(x, y)$  to  $(\xi, \eta)$  is performed, with the wing configuration in the  $(x, y)$  plane, a skewed trapezoidal, transformed to a square in the  $(\xi, \eta)$  plane, as shown in Fig. 1.

The transformation can be formulated as

$$\left. \begin{aligned} x &= \sum_{i=1}^4 N_i(\xi, \eta) x_i \\ y &= \sum_{i=1}^4 N_i(\xi, \eta) y_i \end{aligned} \right\} \quad (3)$$

where

$$\left. \begin{aligned} N_1(\xi, \eta) &= \frac{1}{4}(1-\xi)(1-\eta) \\ N_2(\xi, \eta) &= \frac{1}{4}(1+\xi)(1-\eta) \\ N_3(\xi, \eta) &= \frac{1}{4}(1+\xi)(1+\eta) \\ N_4(\xi, \eta) &= \frac{1}{4}(1-\xi)(1+\eta) \end{aligned} \right\} \quad (4)$$

Write the inverse of the Jacobian matrix as

$$[J]^{-1} = \begin{bmatrix} \frac{\partial x}{\partial \xi} & \frac{\partial x}{\partial \eta} \\ \frac{\partial y}{\partial \xi} & \frac{\partial y}{\partial \eta} \end{bmatrix}^{-1} = \begin{bmatrix} \bar{J}_{11} & \bar{J}_{12} \\ \bar{J}_{21} & \bar{J}_{22} \end{bmatrix}. \quad (5)$$

We express the displacement components on the plane  $z = 0$  in Eq. (1), i.e.  $u_0$ ,  $v_0$ ,  $w_0$ ,  $\phi_x$  and  $\phi_y$ , in the following forms

$$\left. \begin{aligned} u_0 &= \{B_{IJ}\}^T \{q_U\} = \sum_{i=1}^I \sum_{j=1}^J U_{ij}(t) B_i(\xi) B_j(\eta) \\ v_0 &= \{B_{KL}\}^T \{q_V\} = \sum_{k=1}^K \sum_{l=1}^L V_{kl}(t) B_k(\xi) B_l(\eta) \\ w_0 &= \{B_{MN}\}^T \{q_W\} = \sum_{m=1}^M \sum_{n=1}^N W_{mn}(t) B_m(\xi) B_n(\eta) \\ \phi_x &= \{B_{PQ}\}^T \{q_X\} = \sum_{p=1}^P \sum_{q=1}^Q X_{pq}(t) B_p(\xi) B_q(\eta) \\ \phi_y &= \{B_{RS}\}^T \{q_Y\} = \sum_{r=1}^R \sum_{s=1}^S Y_{rs}(t) B_r(\xi) B_s(\eta) \end{aligned} \right\} \quad (6)$$

or

$$\{u_0, v_0, w_0, \phi_x, \phi_y\}^T = [H]\{q\} \quad (7)$$

where  $I, J, K, L, M, N, P, Q, R$  and  $S$  are integers,

$$\left. \begin{aligned} \{q\} &= \{ \{q_U\}^T, \{q_V\}^T, \{q_W\}^T, \{q_X\}^T, \{q_Y\}^T \}^T \\ \{q_U\} &= \{U_{11}, U_{12}, \dots, U_{1J}, U_{21}, \dots, U_{2J}, \dots, U_{I1}, \dots, U_{IJ}\}^T \\ \{q_V\} &= \{V_{11}, \dots, V_{KL}\}^T, \{q_W\} = \{W_{11}, \dots, W_{MN}\}^T \\ \{q_X\} &= \{X_{11}, \dots, X_{PQ}\}^T, \{q_Y\} = \{Y_{11}, \dots, Y_{RS}\}^T \end{aligned} \right\} \quad (8)$$

is the generalized displacement vector, and

$$[H] = \text{diag}[\{B_{IJ}\}^T, \{B_{KL}\}^T, \{B_{MN}\}^T, \{B_{PQ}\}^T, \{B_{RS}\}^T] \quad (9)$$

where

$$\left. \begin{aligned} \{B_{\mu\nu}\} &= \{B_1(\xi)B_1(\eta), B_1(\xi)B_2(\eta), \dots, B_\mu(\xi)B_\nu(\eta)\}^T \\ \mu\nu &= IJ, KL, MN, PQ, RS \end{aligned} \right\} \quad (10)$$

is the Ritz base function vector, in which  $B_i(x)$  can be chosen to be the Legendre polynomials:

$$B_i(x) = P_{i-1}(x) \quad (11)$$

where

$$\left\{ \begin{aligned} P_0(x) &= 1 \\ P_1(x) &= x \\ P_{n+1}(x) &= \frac{2n+1}{n+1} x P_n(x) - \frac{n}{n+1} P_{n-1}(x), n = 1, \dots \end{aligned} \right.$$

### Strain Energy of a Wing Structure

The strain energy of a wing structure is

$$U = \frac{1}{2} \iiint_V \{\sigma\}^T \{\epsilon\} dV \quad (12)$$

By introducing the stress-strain relations of the generalized Hooke's law, Eq. (12) becomes

$$U = \frac{1}{2} \iiint_V \{\varepsilon\}^T [D] \{\varepsilon\} dV \quad (13)$$

Note that  $\{\sigma\} = [D]\{\varepsilon\}$  and  $[D]^T = [D]$  is assumed, and the integration domain  $V$  in Eqs. (12) and (13) includes all and only the spaces the components of the wing occupy.

Using Eqs. (5), we can write

$$\begin{Bmatrix} \frac{\partial f}{\partial x} \\ \frac{\partial f}{\partial y} \end{Bmatrix} = ([J]^T)^{-1} \begin{Bmatrix} \frac{\partial f}{\partial \xi} \\ \frac{\partial f}{\partial \eta} \end{Bmatrix} = ([J]^{-1})^T \begin{Bmatrix} \frac{\partial f}{\partial \xi} \\ \frac{\partial f}{\partial \eta} \end{Bmatrix} = \begin{bmatrix} \bar{J}_{11} & \bar{J}_{21} \\ \bar{J}_{12} & \bar{J}_{22} \end{bmatrix} \begin{Bmatrix} \frac{\partial f}{\partial \xi} \\ \frac{\partial f}{\partial \eta} \end{Bmatrix} \quad (14)$$

From Eqs. (2) and (14), we have

$$\{\varepsilon\} = \begin{Bmatrix} \varepsilon_x \\ \varepsilon_y \\ 2\varepsilon_{xy} \\ 2\varepsilon_{yz} \\ 2\varepsilon_{zx} \end{Bmatrix} = \begin{bmatrix} \bar{J}_{11} & \bar{J}_{21} & 0 & 0 & 0 & 0 & z\bar{J}_{11} & z\bar{J}_{21} & 0 & 0 & 0 & 0 \\ 0 & 0 & \bar{J}_{12} & \bar{J}_{22} & 0 & 0 & 0 & 0 & z\bar{J}_{12} & z\bar{J}_{22} & 0 & 0 \\ \bar{J}_{12} & \bar{J}_{22} & \bar{J}_{11} & \bar{J}_{21} & 0 & 0 & z\bar{J}_{12} & z\bar{J}_{22} & z\bar{J}_{11} & z\bar{J}_{21} & 0 & 0 \\ 0 & 0 & 0 & 0 & \bar{J}_{12} & \bar{J}_{22} & 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & \bar{J}_{11} & \bar{J}_{21} & 0 & 0 & 0 & 0 & 1 & 0 \end{bmatrix} \{\bar{\varepsilon}\} = [T]\{\bar{\varepsilon}\} \quad (15)$$

in which  $\{\bar{\varepsilon}\}$  is

$$\{\bar{\varepsilon}\} = \left\{ \frac{\partial u_0}{\partial \xi}, \frac{\partial u_0}{\partial \eta}, \frac{\partial v_0}{\partial \xi}, \frac{\partial v_0}{\partial \eta}, \frac{\partial w_0}{\partial \xi}, \frac{\partial w_0}{\partial \eta}, \frac{\partial \phi_x}{\partial \xi}, \frac{\partial \phi_x}{\partial \eta}, \frac{\partial \phi_y}{\partial \xi}, \frac{\partial \phi_y}{\partial \eta}, \phi_x, \phi_y \right\}^T = [C]\{q\} \quad (16)$$

where

$$[C] = \begin{bmatrix} [B_{IJ,\xi\eta}] & 0 & 0 & 0 & 0 \\ 0 & [B_{KL,\xi\eta}] & 0 & 0 & 0 \\ 0 & 0 & [B_{MN,\xi\eta}] & 0 & 0 \\ 0 & 0 & 0 & [B_{PQ,\xi\eta}] & 0 \\ 0 & 0 & 0 & 0 & [B_{RS,\xi\eta}] \\ 0 & 0 & 0 & \{B_{PQ}\}^T & 0 \\ 0 & 0 & 0 & 0 & \{B_{RS}\}^T \end{bmatrix} \quad (17)$$

in which

$$[B_{\mu\nu,\xi\eta}] = \begin{bmatrix} B'_1(\xi)B_1(\eta) & B'_1(\xi)B_2(\eta) & \cdots & B'_\mu(\xi)B_\nu(\eta) \\ B_1(\xi)B'_1(\eta) & B_1(\xi)B'_2(\eta) & \cdots & B_\mu(\xi)B'_\nu(\eta) \end{bmatrix}, \quad \mu\nu = IJ, KL, MN, PQ, RS,$$

$\{B_{\mu\nu}\}$  can be found in Eq. (10), and  $\{q\}$  is the general displacement vector defined in Eq. (8).

Substitute Eqs. (15), (16) into Eq. (13), and we have

$$U = \frac{1}{2} \iiint_V \{q\}^T [C]^T [T]^T [D] [T] [C] \{q\} dV \quad (18)$$

If we write

$$U = \frac{1}{2} \{q\}^T [K] \{q\} \quad (19)$$

Then comparison of (18) and (19) gives

$$[K] = \iiint_V [C]^T [T]^T [D] [T] [C] dV \quad (20)$$

This is the stiffness matrix of the wing in terms of  $\{q\}$ . Note that the constitutive matrix  $[D]$  for different parts of the wing structure should be different.

### Kinetic Energy of a Wing Structure

The kinetic energy of a wing structure is

$$T = \frac{1}{2} \iiint_V \rho \bar{v}^2 dV = \frac{1}{2} \iiint_V \rho \{\bar{v}\}^T \{\bar{v}\} dV \quad (21)$$

where  $\{\bar{v}\}$ , the velocity vector, can be written as

$$\{\bar{v}\} = \left\{ \frac{\partial \bar{d}}{\partial t} \right\} = \begin{bmatrix} \frac{\partial u_0}{\partial t} + z \frac{\partial \phi_x}{\partial t} \\ \frac{\partial v_0}{\partial t} + z \frac{\partial \phi_y}{\partial t} \\ \frac{\partial w_0}{\partial t} \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & z & 0 \\ 0 & 1 & 0 & 0 & z \\ 0 & 0 & 1 & 0 & 0 \end{bmatrix} \begin{bmatrix} \frac{\partial u_0}{\partial t} \\ \frac{\partial v_0}{\partial t} \\ \frac{\partial w_0}{\partial t} \\ \frac{\partial \phi_x}{\partial t} \\ \frac{\partial \phi_y}{\partial t} \end{bmatrix} = [Z][H] \{\dot{q}\} \quad (22)$$

in which

$$[Z] = \begin{bmatrix} 1 & 0 & 0 & z & 0 \\ 0 & 1 & 0 & 0 & z \\ 0 & 0 & 1 & 0 & 0 \end{bmatrix}, \quad (23)$$

$[H]$  is defined in Eq. (9), and  $\{\dot{q}\}$  is the time-derivative of  $\{q\}$ .

Then we have

$$T = \frac{1}{2} \iiint_V \rho \{\dot{q}\}^T [H]^T [ZZ] [H] \{\dot{q}\} dV \quad (24)$$

where

$$[ZZ] = [Z]^T [Z] = \begin{bmatrix} 1 & 0 & 0 & z & 0 \\ 0 & 1 & 0 & 0 & z \\ 0 & 0 & 1 & 0 & 0 \\ z & 0 & 0 & z^2 & 0 \\ 0 & z & 0 & 0 & z^2 \end{bmatrix} \quad (25)$$

Comparing

$$T = \frac{1}{2} \{\dot{q}\}^T [M] \{\dot{q}\} \quad (26)$$

with Eq. (24) we have

$$[M] = \iiint_V \rho [H]^T [ZZ] [H] dV \quad (27)$$

which is the mass matrix of the wing in terms of the general velocity vector,  $\{\dot{q}\}$ .

### Numerical Integration of Stiffness and Mass Matrices

For a specific wing, now we want to evaluate the integrals in Eqs. (20) and (27).

Assume  $I = J = K = L = M = N = P = Q = R = S = k$ , then we know  $[K]$  and  $[M]$  will be matrices of dimension  $N \times N$ , where  $N = 5k^2$ .

We know coordinates in  $(x, y)$  plane are transformed to  $(\xi, \eta)$ , but coordinate  $z$  remains the same.

Therefore, for an integral in space  $(x, y, z)$ , we have

$$I = \iiint_V F(x, y, z) dV = \int_{-1}^1 \int_{-1}^1 G(\xi, \eta) d\xi d\eta \quad (28)$$

where

$$G(\xi, \eta) = \sum_{i=1}^{N_z} \int_{z_{i1}}^{z_{i2}} F[x(\xi, \eta), y(\xi, \eta), z] \cdot |J| dz \quad (29)$$

here  $N_z$  is the number of integration zones in  $z$ -direction, and  $z_{i1}$  and  $z_{i2}$  are integration limits of the  $i$ -th zone.

Using the Gaussian quadrature, we can get the numerical value of integral (28) as

$$I \cong \sum_{i=1}^{M_\xi} \sum_{j=1}^{N_\eta} g_i^{(M_\xi)} g_j^{(N_\eta)} G[\xi_i^{(M_\xi)}, \eta_j^{(N_\eta)}] \quad (30)$$

where  $g_i^{(M_\xi)}, g_j^{(N_\eta)}$  are the weights,  $\xi_i^{(M_\xi)}, \eta_j^{(N_\eta)}$  are the sampling points, and  $M_\xi$  and  $N_\eta$  represent the number of sampling points used in the  $\xi$  and  $\eta$  directions respectively.

For a wing composed of skins, spars and ribs, the integrals in Eq. (28) can be detailed as follows:

#### (a) Skins

The sketch of skins at a wing section is shown in Fig. 2. Particulars of integration for skins:

$$\iiint_V F(x, y, z) dV = \int_{-1}^1 \int_{-1}^1 \left( \int_{z_L - \frac{1}{2}t_L}^{z_L + \frac{1}{2}t_L} F \cdot |J| dz + \int_{z_U - \frac{1}{2}t_U}^{z_U + \frac{1}{2}t_U} F \cdot |J| dz \right) d\xi d\eta \quad (31)$$

where  $t_{L,U} = t_0 \sqrt{1 + \tan^2 \alpha_{L,U}}$ , subscript  $L, U$  indicate the lower and upper skin respectively. It should be noted that for skins composed of laminated layers the skin contributions can be obtained by simply adding up the effects of all the layers, with the material constitutive matrix of each layer being treated separately.

(b) Spars

Their contribution to the stiffness and mass matrices can be calculated by performing the integrals for each spar. Representative dimensions of a spar are shown in Fig. 3. Thus, for a spar cap, we have:

$$\begin{aligned} \iiint_V F(x, y, z) dx dy dz &= \int_{-1}^1 d\eta \int_{\xi_s(\eta) - \frac{t_1}{c}}^{\xi_s(\eta) + \frac{t_1}{c}} d\xi \left( \int_{z_L + \frac{1}{2}t_L}^{z_U + \frac{1}{2}t_L + h} + \int_{z_U - \frac{1}{2}t_U}^{z_U - \frac{1}{2}t_U - h_1} \right) F[x(\xi, \eta), y(\xi, \eta), z] \cdot |J| dz \\ &= \int_{-1}^1 d\eta \int_{-1}^1 (t_1/c) d\xi \left( \int_{z_L + \frac{1}{2}t_L}^{z_U + \frac{1}{2}t_L + h} + \int_{z_U - \frac{1}{2}t_U}^{z_U - \frac{1}{2}t_U - h_1} \right) F\{x[(t_1/c)\xi + \xi_s(\eta), \eta], y[(t_1/c)\xi + \xi_s(\eta), \eta], z\} |J| dz \end{aligned} \quad (32)$$

where  $c$  is the chord-length at  $\eta$ :  $c = \frac{1}{2}c_0(1-\eta) + \frac{1}{2}c_1(1+\eta)$ ,  $c_0$ : the chord-length at wing root,  $c_1$ : the chord-length at wing tip, and  $\xi_s(\eta)$  is the spar position function. Equation (32) can be easily computed numerically using Eq. (30).

For the spar web:

$$\begin{aligned} \iiint_V F(x, y, z) dx dy dz &= \int_{\xi_s - \frac{t_1}{c}}^{\xi_s + \frac{t_1}{c}} \int_{-1}^1 \int_{z_L + \frac{1}{2}t_L + h_1}^{z_U - \frac{1}{2}t_U - h_1} F[x(\xi, \eta), y(\xi, \eta), z] \cdot |J| d\xi d\eta dz \\ &= \int_{-1}^1 d\eta \int_{-1}^1 (t_1/c) d\xi \int_{z_L + \frac{1}{2}t_L + h_1}^{z_U - \frac{1}{2}t_U - h_1} F\{x[(t_1/c)\xi + \xi_s(\eta), \eta], y[(t_1/c)\xi + \xi_s(\eta), \eta], z\} |J| dz \end{aligned} \quad (33)$$

(c) Ribs

The contributions of the ribs to the stiffness and mass matrices can be calculated in a manner similar to the one used for spars. The dimensions of a rib are also given in Fig. 3.

For a rib cap:

$$\begin{aligned} \iiint_V F(x, y, z) dx dy dz &= \int_{-1}^1 \int_{\eta_r - \frac{t_2}{s}}^{\eta_r + \frac{t_2}{s}} \left( \int_{z_L + \frac{1}{2}t_L}^{z_U + \frac{1}{2}t_L + h_2} + \int_{z_U - \frac{1}{2}t_U}^{z_U - \frac{1}{2}t_U - h_2} \right) F[x(\xi, \eta), y(\xi, \eta), z] \cdot |J| d\xi d\eta dz \\ &= \int_{-1}^1 d\xi \int_{-1}^1 (t_2/s) d\eta \left( \int_{z_L + \frac{1}{2}t_L}^{z_U + \frac{1}{2}t_L + h_2} + \int_{z_U - \frac{1}{2}t_U}^{z_U - \frac{1}{2}t_U - h_2} \right) F\{x[\xi, (t_2/s)\eta + \eta_r(\xi)], y[\xi, (t_2/s)\eta + \eta_r(\xi)], z\} |J| dz \end{aligned} \quad (34)$$

where  $s$  is the wing semi-span, and  $\eta_r(\xi)$  is the rib position function.

For the rib web:

$$\begin{aligned}
\iiint_V F(x, y, z) dx dy dz &= \int_{-1}^1 \int_{\eta_r - \frac{t_2}{s}}^{\eta_r + \frac{t_2}{s}} \int_{z_L + \frac{1}{2}t_L + h_2}^{z_U - \frac{1}{2}t_U - h_2} F[x(\xi, \eta), y(\xi, \eta), z] \cdot |J| d\xi d\eta dz \\
&= \int_{-1}^1 d\xi \int_{-1}^1 (t_2/s) d\eta \int_{z_L + \frac{1}{2}t_L + h_2}^{z_U - \frac{1}{2}t_U - h_2} F\{x[\xi, (t_2/s)\eta + \eta_r(\xi)], y[\xi, (t_2/s)\eta + \eta_r(\xi)], z\} |J| dz
\end{aligned} \tag{35}$$

The same as for the spars, integration on ribs can be obtained by summing up contributions from all the ribs.

### Boundary Conditions and Convergence

Applying linear and rotational springs with very large magnitudes of stiffness on the boundaries can approximate the boundary conditions of clamped edge. Applying linear springs with very large magnitudes of stiffness on the boundaries can approximate the boundary conditions of simply supported edge. Details of these practices can be found in Lovejoy and Kapania<sup>11</sup>.

A series of convergence study on the number of terms,  $k$ , of the polynomials used for various cases of plates were performed in Lovejoy and Kapania<sup>11</sup>. The conclusion is, when more terms are used the tendency of convergence is obvious, and when  $k = 8$ , the first several modes are very close to convergence. In the present research, it is found that there is little difference in the results if the Legendre or Chebyshev polynomials are used, and the convergence pattern for a built-up wing structure is quite similar to that for plates. Therefore  $k = 8$  is used throughout the present study.

### Formulation for Vibration Problem of Wing

Under the assumption that the wing is a conservative system, the Lagrange's equations<sup>28</sup> for free vibration are

$$\frac{d}{dt} \left( \frac{\partial L}{\partial \dot{q}_j} \right) - \frac{\partial L}{\partial q_j} = 0 \quad j = 1, \dots, \mu\nu, \quad \mu\nu = IJ, KL, MN, PQ, RS. \tag{36}$$

Since the Lagrangian for the wing is

$$L = T - V = T - U \quad (37)$$

where  $V$  is the potential energy, and by using Eqs. (19), (26) and (36), we can find the natural frequencies and mode shapes for the free vibrating wing by solving the following eigenvalue problem

$$[K - \lambda M] \{x\} = 0 \quad (38)$$

where  $\lambda = \omega^2$  is an eigenvalue of the system of equations,  $\omega$  is the corresponding frequency in radians/second, and  $\{x\}$  is the corresponding eigenvector.

### Static Problem Solutions

Assume that an external, distributed force with components  $P_x(x, y, t)$ ,  $P_y(x, y, t)$  and  $P_z(x, y, t)$  is applied on the wing structure, then the virtual work done by this load on the infinitesimal area  $dx \cdot dy$  is

$$\delta Q = \delta Q_x + \delta Q_y + \delta Q_z \quad (39)$$

where

$$\begin{aligned} \delta Q_x &= P_x(x, y, t) \cdot \delta u(x, y, z, t) \cdot dx \cdot dy \\ \delta Q_y &= P_y(x, y, t) \cdot \delta v(x, y, z, t) \cdot dx \cdot dy \\ \delta Q_z &= P_z(x, y, t) \cdot \delta w(x, y, z, t) \cdot dx \cdot dy \end{aligned} \quad (40)$$

and by using Eq. (1) we obtain

$$\begin{aligned} \delta Q_x &= P_x \cdot (\delta u_0 + z \cdot \delta \phi_x) \cdot dx \cdot dy \\ \delta Q_y &= P_y \cdot (\delta v_0 + z \cdot \delta \phi_y) \cdot dx \cdot dy \\ \delta Q_z &= P_z \cdot \delta w_0 \cdot dx \cdot dy \end{aligned} \quad (41)$$

Using Eq. (6), that is, approximating the displacements  $u_0, v_0, w_0, \phi_x, \phi_y$  in terms of the Ritz functions, the total work done by the external force on the whole wing surfaces is given by

$$\begin{aligned} \delta Q &= \iint \left[ P_x \{B_{IJ}\}^T \{\delta q_U\} + P_y \{B_{KL}\}^T \{\delta q_V\} + P_z \{B_{MN}\}^T \{\delta q_W\} \right. \\ &\quad \left. + z P_x \{B_{PQ}\}^T \{\delta \phi_x\} + z P_y \{B_{RS}\}^T \{\delta \phi_y\} \right] dx dy \\ &= \{P\}^T \{\delta q\} \end{aligned} \quad (42)$$

where  $\{P\}$  is the generalized load vector

$$\{P\} = \{\{P_1\} \quad \{P_2\} \quad \{P_3\} \quad \{P_4\} \quad \{P_5\}\}^T \quad (43)$$

in which

$$\begin{aligned} \{P_{1,2,3}\} &= \iint P_{x,y,z}(x, y, t) \{B_{IJ,KL,MN}\}^T dx dy \\ \{P_{4,5}\} &= z \iint P_{x,y}(x, y, t) \{B_{PQ,RS}\}^T dx dy \end{aligned} \quad (44)$$

If the external force is a concentrated force, the above derivations can be simplified. For instance for the first component of the generalized load vector we have

$$P_1 = P_x(x(\xi_a, \eta_a), y(\xi_a, \eta_a), t) \{B_{IJ}(\xi_a, \eta_a)\}^T \quad (45)$$

where  $(\xi_a, \eta_a)$  is the transformed coordinates of the point where the load is applied.

Using the principle of virtual work, we have, for the static case, the following relation for the generalized displacement vector  $\{q\}$  and the generalized load vector  $\{P\}$

$$[K]\{q\} = \{P\} \quad (46)$$

## Results and Discussion

In order to assess the accuracy of the present method and test its performance in various situations, a series of calculations were carried out for several wing-shaped structures clamped at the root. Results using MSC/NASTRAN, a commercial finite element code, are provided for comparison. Finally, for the

comparison between the present method and an existing FSDT method, a swept-back box wing used as a test case in Livne<sup>21</sup> were calculated for its free vibration and static response analyses.

### Free Vibration Analysis

(a) *A Trapezoidal Plate.* The geometric and material parameters for the plate are given as: Span=192 inches, Root width=72 inches, Tip width=36 inches, Sweep angle (leading edge)=30°, Thickness=1.8 inch (thickness ratio at tip=1/20); Mass Density  $\rho = 2.526 \times 10^{-4} \text{ lb} \cdot \text{sec}^2 / \text{in}^4$ , Young's Modulus  $E = 1.025 \times 10^7 \text{ lb} / \text{in}^2$ , Poisson's Ratio  $\nu = 0.3$ . The plate is clamped at the root.

Comparisons are made in Fig. 4 between the mode shapes as obtained by the present method and those by the FEA calculations using MSC/NASTRAN employing 200 shell elements (CQUAD4). The comparison of the natural frequencies is also shown in Fig. 4. It can be seen that both the mode shapes and natural frequencies as obtained using the present method, are in good agreement with those obtained using the FEA. The relative differences of the natural frequencies for the first 8 modes are within -0.62~2.12%.

(b) *A Trapezoidal Shell with a Camber.* All parameters are the same as with the previous case except that there is a camber with the camber-chord ratio varying from 2.345% at the root to 0.938% at the tip.

Comparisons are made between the results as obtained by the present method with those obtained using the FEA in MSC/NASTRAN employing 200 shell elements(CQUAD4), as shown in Fig. 5.

It can be seen that, although this case is very similar to the previous one except for a small camber, there are significant differences in the natural frequencies of a number of modes. Most of the variations were predicted quite accurately by the present method, as shown clearly in the comparison with the FEA results in Fig. 5. But the relative differences were slightly higher than the ones in the previous case, varying in a range of -1.31% to 5.26% for the first 8 modes. Larger differences for the present case can be attributed to the fact that the present method ignores the coupling between the inplane and transverse displacements caused by the mid-surface curvature.

(c) *A Solid Wing*. The middle surface of this wing is the same as that of the previous case. Its thickness-chord ratio is varied from 0.15 at the root to 0.06 at the tip. The sections were generated by the Karman-Trefftz transformation<sup>29</sup>.

Comparisons are made in Fig. 6 between the results as obtained by the present method with those obtained by the FEA calculations using MSC/NASTRAN employing 250 solid elements (CHEXA and CPENTA) and 572 nodes. It can be seen that although there are thickness variations as well as a camber, the present method yields results that compare quite well with those obtained using the FEA. The relative differences for the first 8 modes were within -5.82~1.42%, comparable to those in the previous case.

(d) *A Built-up Wing Composed of Skins, Spars and Ribs*. The outside geometrical shape is the same as in the previous case, the solid wing. There are 4 spars and 10 ribs distributed uniformly in the wing. Particulars of the wing are: Skin Thickness  $t_0 = .118in$ ; Spar Cap Height  $h_1 = .197in$ , Spar Cap Width  $l_1 = .373in$ , Spar Web Thickness  $t_1 = .058in$ ; the ribs have the same cap dimensions and web thickness as the spars.

The FEA calculations are made by using MSC/NASTRAN employing 370 elements and 110 nodes. The wing skins were modeled using shell elements (CQUAD4), the spar and rib caps were modeled using bar elements (CBAR), and the spar and rib webs were modeled using shear panel elements (CSHEAR). Comparison between the mode shapes as well as the corresponding natural frequencies as obtained by the two methods are shown in Fig. 7. It can be seen that the mode shapes were simulated equally well by the present method as compared to the FEA, and it is found that the relative differences for the first 8 modes were within -4.79~2.15 %, comparable to those in the previous cases.

(e) *A Box Wing used as a test case in Livne*<sup>21</sup>. This is a cantilevered all aluminum wing swept back by 30°. It has a constant thickness and constant chord length. Its 5 spars and 3 ribs with identical cross sections are bonded to the top and bottom cover skins. Details of this box wing can be found in Refs. 21

and 30. The same kinds of elements were employed as in the previous case. Results for the natural frequencies by the FEA using MSC/NASTRAN and the present FSDT are shown in Table 1, in comparison with those given in Livne<sup>21</sup> by the FEA using ELFINI and a FSDT based on simple-polynomial trial functions. While there are some differences between the two FEA calculations, which may have been caused by different discretization and element choices, the accuracy of the present FSDT results are promising.

### **Displacement under Static Loads**

The built-up wing in case (c) of the free vibration analysis is used here. Three cases of static load were considered and the results compared with the FEA calculations using MSC/NASTRAN are shown as follows.

(a) *Tip Point Force.* A downward ( $-z$ -direction) force of magnitude of  $1\text{ lb}$  is applied at the middle point of the wing tip. The displacements along the leading and trailing edge of the wing are shown in Fig. 8. It can be seen that the present method calculated the vertical displacement  $w$  accurately compared with the FEA, and also predicted quite well the trends of variation for the other two displacement components,  $u$  and  $v$ .

(b) *A Force Distribution.* A downward ( $-z$ -direction) force of magnitude of  $1\text{ lb}$  is applied at every upper-surface nodes of the FEA model. This is a case similar to the wing being under uniform pressure difference between its upper and lower surfaces. The displacements along the leading and trailing edge of the wing are shown in Fig. 9. Quite similar results to those in load case (a) were obtained.

(c) *Tip Torque.* A downward ( $-z$ -direction) force of magnitude of  $1\text{ lb}$  is applied at the tip of the fore-most spar, while an upward ( $z$ -direction) force of magnitude of  $1\text{ lb}$  is applied at the tip of the aft-most spar. This is a case in which the wing tip is subjected to a torque. The displacements along the leading and trailing edges of the wing are shown in Fig. 10. The relative difference for  $w$  at the tip/leading-edge corner

and tip/trailing-edge corner are 26.4% and 2.64% respectively. Note that the absolute differences are  $0.397 \times 10^{-4}$  inch and  $0.181 \times 10^{-4}$  inch respectively; therefore the large relative difference at the tip/leading-edge corner is because of the small magnitude of  $w$  along the leading edge, and the difference between the twist angles predicted by the two methods would be small.

(d) *The Box Wing in Livne*<sup>21</sup>. The swept-back box wing is under a downward point force of 1 lb at the tip of the rear spar. Displacements at the wing tip from measurement, FEA calculation and present method are shown in Table 2. It can be seen that the present method yielded very good results for this test case.

### **Skin Stress Distributions**

The upper and lower skin stress of the wing in (a) of the above static cases were calculated using the present method. The Von Mises stress distribution along a line with a distance of 5% span to the root chord is shown in Fig. 11(a) in comparison with points obtained using MSC/NASTRAN. Also the Von Mises stress distribution along a span-wise line with a distance of 37.5% chord length to the leading edge is shown in Fig. 11(b) in comparison with points obtained using MSC/NASTRAN. It can be seen that, although there are substantial differences (the largest one is about 15%) between the present calculations and the stresses determined using the FEA, the variation trends of the stresses from both methods are quite similar. This means that the position of the largest stress determined by the present method will be reliable.

### **Conclusion**

A method capable of static and vibration analyses of the general built-up wing structures composed of skins, spars and ribs has been developed and comparisons for a series of examples with commercial FEA calculations have shown the accuracy of the method for design purposes. On the assumption that the wing structure behaves like a plate whose deformation can be modeled by the FSDT of Reissner-Mindlin, the Rayleigh-Ritz method is applied to solve the plate problem, with the Legendre polynomials being used as

the trial functions. The stiffness and mass matrices are determined by applying the Lagrange's equations, and can be calculated numerically by using the Gaussian integration quadrature. Then static analysis can be readily performed and the natural frequencies and the mode shapes of the wing can be obtained by solving an eigenvalue problem.

Comparison of results by the present method with those by the commercial finite element analysis code MSC/NASTRAN for a series of 5 vibration problems, 4 static loading problems, and 1 stress distribution problem showed an overall good agreement between the two approaches with different methodologies. Mode shapes and natural frequencies for cases from a thick wing-shaped plate, the same plate with a camber, a solid wing, to built-up wing structures composed of skins, spars and ribs, have all shown that the present method has a fairly good correlation to the FEA, although results for simpler cases seem to be more accurate. It was also shown that static displacements and stress variation trends of wing structure can be predicted by the present method quite accurately. The present method is formulated mostly in matrix form and calculation can be readily carried out in the MATLAB environment. It is suitable to be used for the early stages of wing design. Due to the efficiency of the method, it can also be used as a means to analyze the shape sensitivity of wing structures.

### Acknowledgments

The authors would like to gratefully acknowledge the support of NASA Langley Research Center on this research through Grant NAG-1-1884 with Drs. Jerry Housner and John Wang as the Technical Monitors.

## References

1. Noor, A. K., Anderson, M. S., and Greene, W. H., "Continuum Models for Beam- and Platelike Lattice Structures", *AIAA Journal*, Vol. 16, No. 12, 1978, pp. 1219-1228.
2. Nayfeh, A. H., and Hefzy, M. S., "Continuum Modeling of the Mechanical and Thermal Behavior of Discrete Large Structures", *AIAA Journal*, Vol. 19, No. 6, 1981, pp. 766-773.
3. Sun, C. T., Kim, B. J., and Bogdanoff, J. L., "On the Derivation of Equivalent Simple Models for Beam- and Plate-Like Structures in Dynamic Analysis", AIAA Paper 81-0624, 1981, pp. 523-532.
4. Noor, A. K., "Continuum Modeling for Repetitive Lattice Structures", *Applied Mechanics Review*, Vol. 41, No. 7, 1988, pp. 285-296.
5. Lee, U., "Dynamic Continuum Modeling of Beamlike Space Structures Using Finite-Element Matrices", *AIAA Journal*, Vol. 28, No. 4, 1990, pp. 725-731.
6. Lee, U., "Dynamic Continuum Plate Representations of Large Thin Lattice Structures", *AIAA Journal*, Vol. 31, No. 9, 1993, pp. 1734-1736.
7. Lee, U., "Spectral Element Approach for the Homogeneous Continuum Representation of a Periodic Lattice Structure", *International Journal of Space Structures*, Vol. 12, No. 1, 1997, pp.1-8.
8. Kapania, R. K. and Castel, F., "A Simple Element for Aeroelastic Analysis of Undamaged and Damaged Wings", *AIAA Journal*, Vol. 28, No. 2, 1990, pp. 329-337.
9. Song, O. and Librescu, L., "Free Vibration and Aeroelastic Divergence of Aircraft Wings Modeled as Composite Thin-Walled Beams", AIAA Paper 91-1187, 1991.
10. Lee, U., "Equivalent Dynamic Beam-Rod Models of Aircraft Wing Structures", *Aeronautical Journal*, Dec. 1995, pp. 450-457.

11. Lovejoy, A. E. and Kapania, R. K., "Natural Frequencies and Atlas of Mode Shapes for Generally-Laminated, Thick, Skew, Trapezoidal Plates", CCMS(Center for Composite Materials and Structures)-94-09, Virginia Polytechnic Institute and State University, Aug. 1994.
12. Dawe, D. J., "Buckling and Vibration of Plate Structures Including Shear Deformation and Related Effects", *Aspects of the Analysis of Plate Structures*, Ed. by Dawe, D. J., Horsington, R. W., Kamtekar, A. G. and Little, G. H., New York, Oxford University Press, 1985, pp. 75-99.
13. Reddy, J. N. and Miravete, A., *Practical Analysis of Composite Laminates*, CRC Press, Inc., Boca Raton, 1995.
14. Reissner, E., "The Effect of Transverse Shear Deformation on the Bending of Elastic Plates", *Journal of Applied Mechanics*, Vol. 12, 1945, pp. A-69~77.
15. Mindlin, R. D., "Influence of Rotatory Inertia and Shear on Flexural Motions of Isotropic, Elastic Plates", *Journal of Applied Mechanics*, Vol. 18, 1951, pp. 31-38.
16. Kapania, R. K. and Raciti, S., "Recent Advances in Analysis of Laminated Beams and Plates, Part I: Shear Effects and Buckling", *AIAA Journal*, Vol. 27, No. 7, 1989, pp. 923-934.
17. Knight, N. F. and Qi, Y., "On a Consistent First-Order Shear-Deformation Theory for Laminated Plates", *Composites Part B: Engineering*, 28 B (1997), pp. 397-405.
18. Giles, G. L., "Equivalent Plate Analysis of Aircraft Wing Box Structures with General Planform Geometry", *Journal of Aircraft*, Vol. 23, No. 11, 1986, pp. 859-864.
19. Giles, G. L., "Equivalent Plate Modeling for Conceptual Design of Aircraft Wing Structures", AIAA Paper 95-3945, September 1995.
20. Tizzi, S., "Numerical Procedure for the Dynamic Analysis of Three-Dimensional Aeronautical Structures", *Journal of Aircraft*, Vol. 34, No. 1, 1997, pp. 120-130.


21. Livne, E., "Equivalent Plate Structural Modeling for Wing Shape Optimization Including Transverse Shear", *AIAA Journal*, Vol. 32, No. 6, 1994, pp. 1278-1288.
22. Livne, E. and Navarro, I., "Nonlinear Equivalent Plate Modeling of Wing Box Structures", 40<sup>th</sup> *AIAA/ASME/ASCE/AHS/ASC SDM Conference*, April 12-15, 1999, St. Louis, MO, pp. 346-372.
23. Kapania, R. K. and Singhvi, S., "Free Vibration Analyses of Generally Laminated Tapered Skew Plates", *Composites Engineering*, Vol. 2, No. 3, 1992, pp. 197-212.
24. Singhvi, S., "Analysis, Shape Sensitivities and Approximations of Modal Response of Generally Laminated Tapered Skew Plates", Master Thesis, Virginia Polytechnic Institute and State University, Sept. 1991.
25. Kapania, R. K. and Lovejoy, A. E., "Free Vibration of Thick Generally Laminated Cantilever Quadrilateral Plates", AIAA Paper 95-1350, 1995; *AIAA Journal*, Vol. 34, No. 7, 1996, pp. 1476-1486.
26. Kapania, R. K. and Lovejoy, A. E., "Free Vibration of Thick Generally Laminated Quadrilateral Plates with Point Supports", AIAA Paper 96-1346, 1996; *Journal of Aircraft*, Vol. 35, No. 6, 1998, pp. 958-965.
27. Cortial, F., "Sensitivity of Aeroelastic Response of Wings Using Equivalent Plate Models", Technical Report, Department of Aerospace and Ocean Engineering, Virginia Tech, 1996.
28. Hurty, W. C. and Rubinstein, M. F., *Dynamics of Structures*, Prentice-Hall, Inc., New Jersey, 1964.
29. Karamcheti, K., *Principles of Ideal-Fluid Aerodynamics*, R. E. Krieger Pub. Co., New York, 1980.
30. Issac, J. C., "Sensitivity Analysis of Wing Aeroelastic Responses", Ph. D. Dissertation, Virginia Polytechnic Institute and State University, Nov. 1995.

**Table 1 Natural frequencies (Hz) of the cantilevered swept-back box wing**

Mode No.	Description of Mode Shape	FEA (Livne <sup>21</sup> )	FSDT (Livne <sup>21</sup> )	FEA (present)	FSDT (present)
1	1 <sup>st</sup> bending	115.6	114.7	116.6	118.0
2	In plane	317.6	312.4	327.9	349.7
3	1 <sup>st</sup> torsion	418.4	428.9	409.4	419.1
4	2 <sup>nd</sup> bending	576.4	575.3	572.1	571.1
5	2 <sup>nd</sup> torsion	1086	1125	1064	1090

**Table 2 Displacement (in) of the cantilevered swept-back box wing**

Position	Measured <sup>21,30</sup>	FEA(present)	FSDT(present)
Front spar tip	$1.81 \times 10^{-4}$	$1.79 \times 10^{-4}$	$1.74 \times 10^{-4}$
Rear spar tip	$2.21 \times 10^{-4}$	$2.19 \times 10^{-4}$	$2.20 \times 10^{-4}$

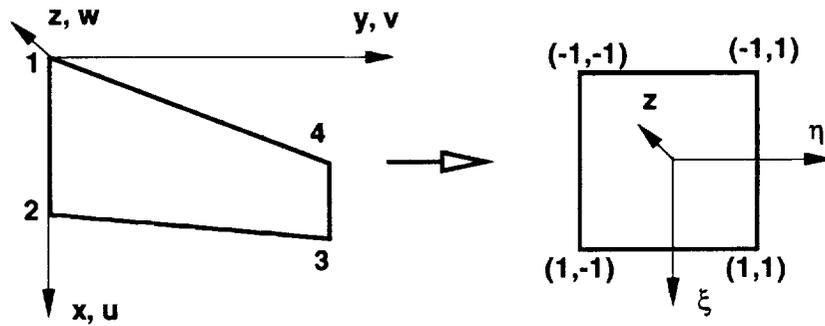

**Fig. 1 The Coordinate System and Its Transformation**

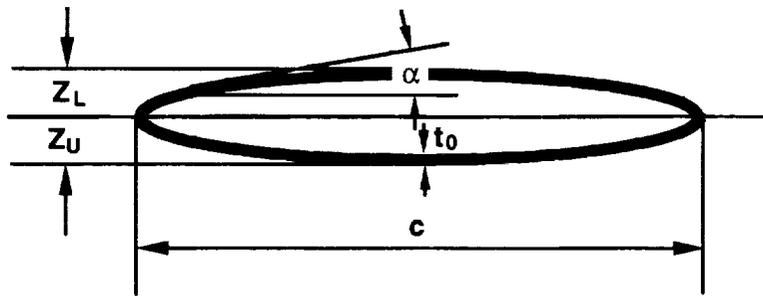


Fig. 2 Wing Skin




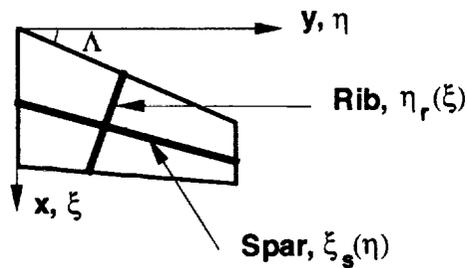


Fig. 3 Wing Spar or Rib











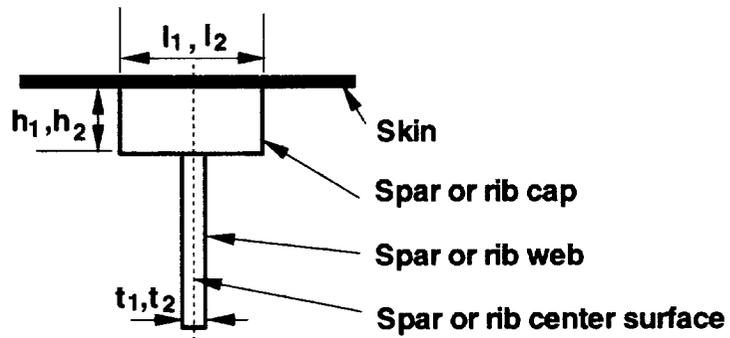
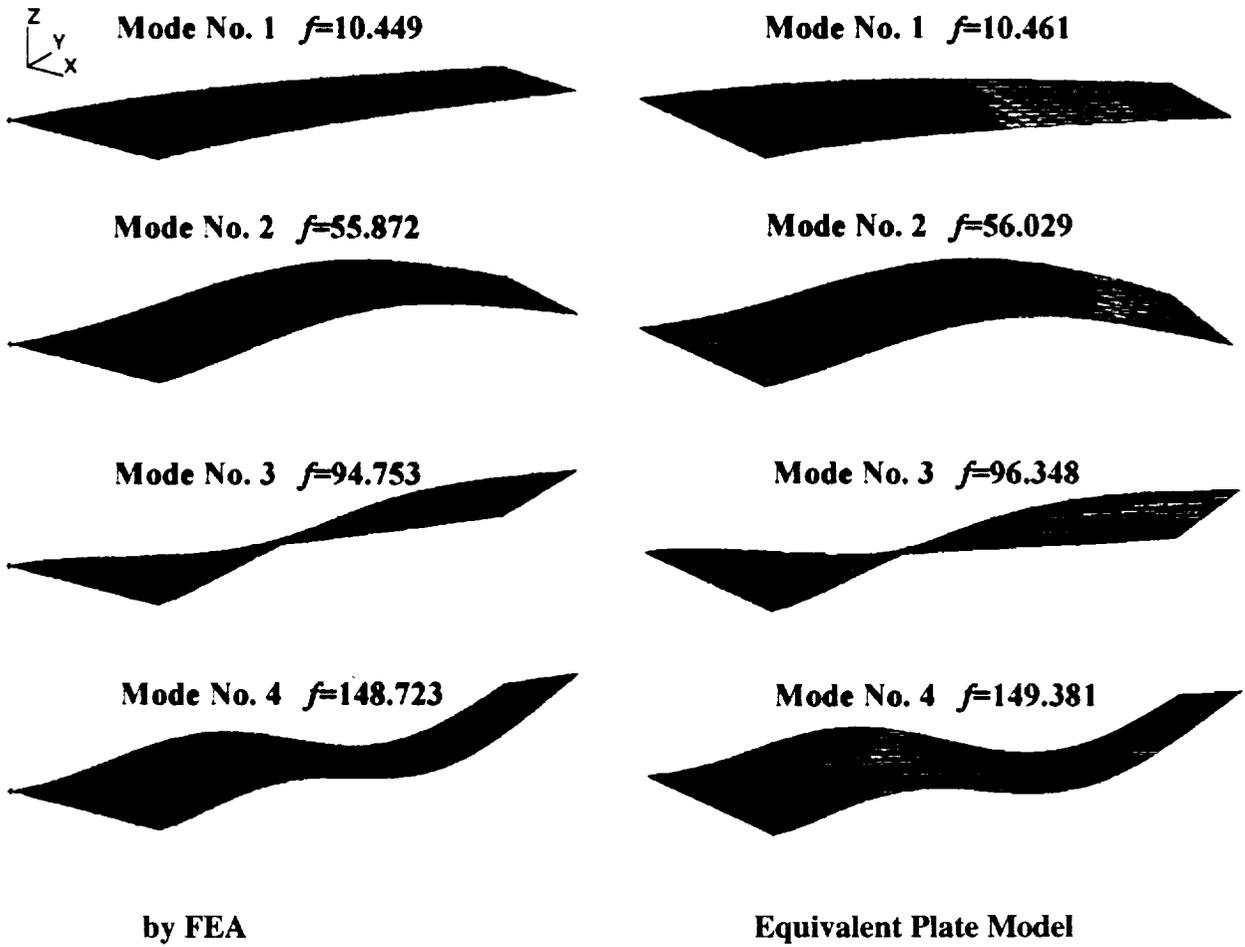


**Fig. 4 Mode Shapes and Natural Frequency  $f$  (rad/s) for a Trapezoidal Plate**

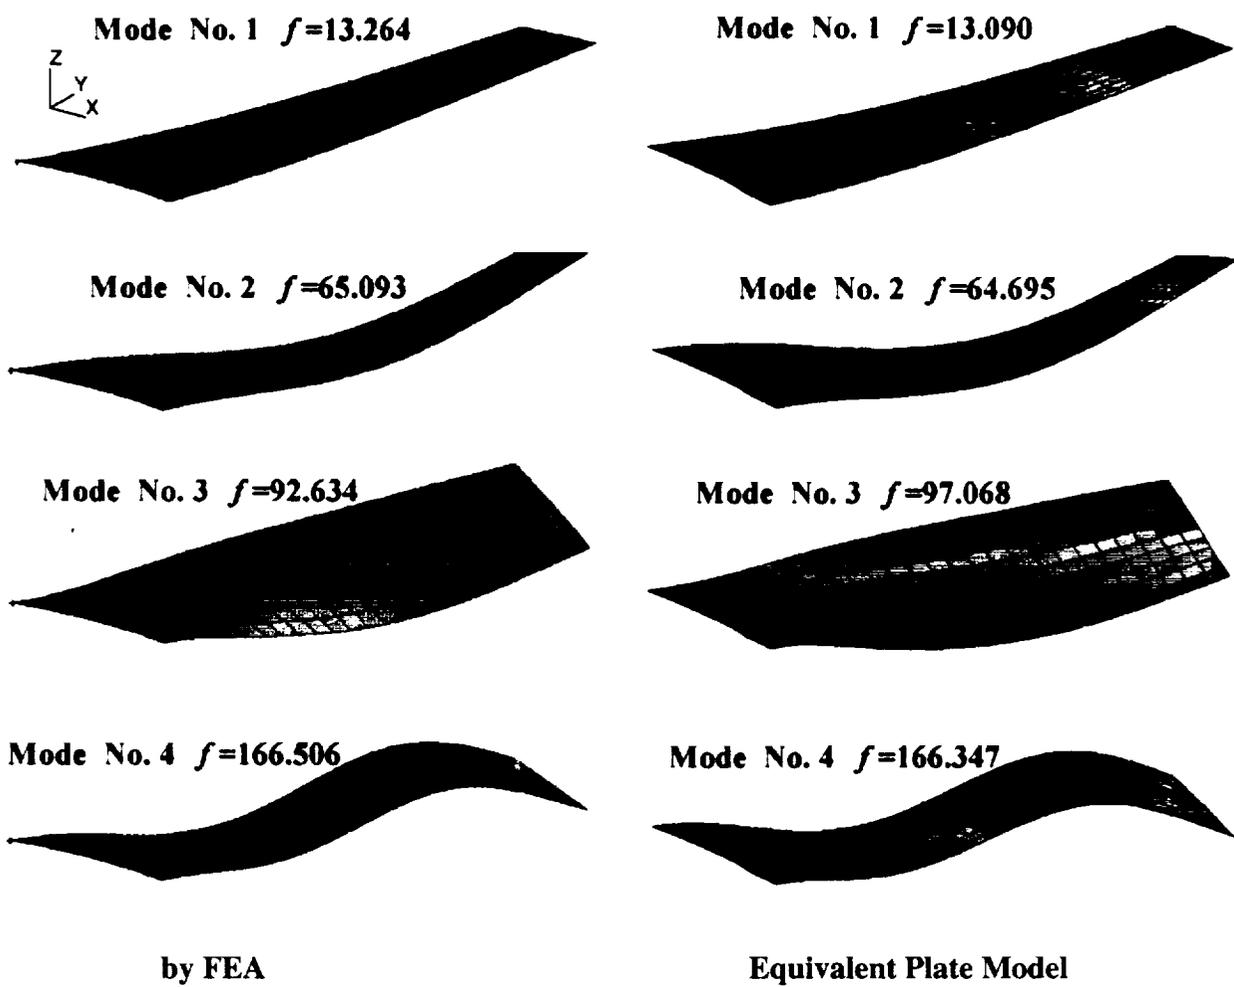

**Fig. 5 Mode Shapes and Natural Frequency  $f$  (rad/s) for Wing-Shaped Shell with a Camber**




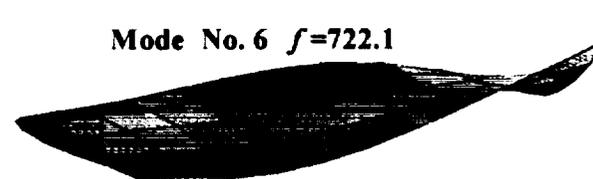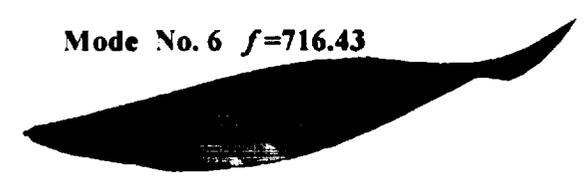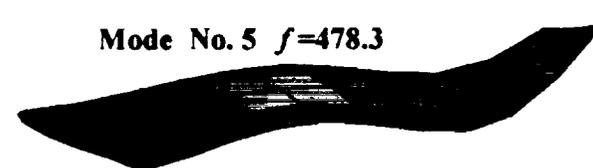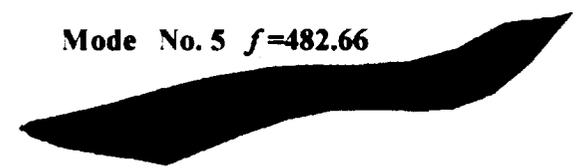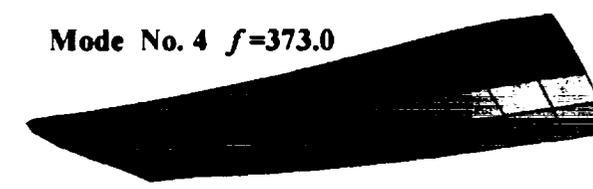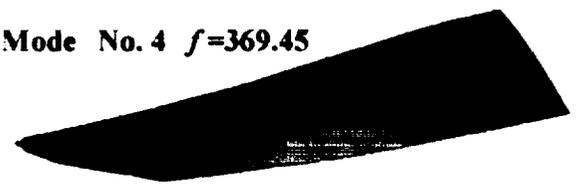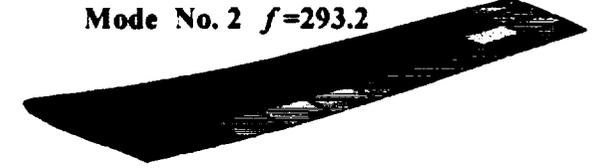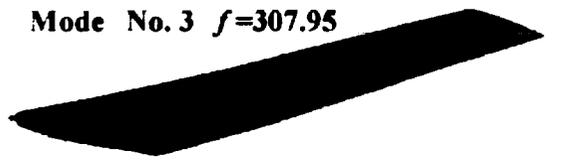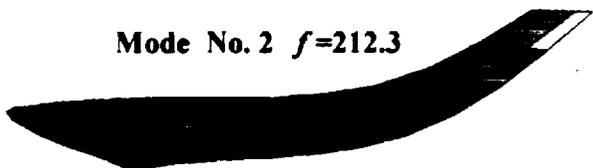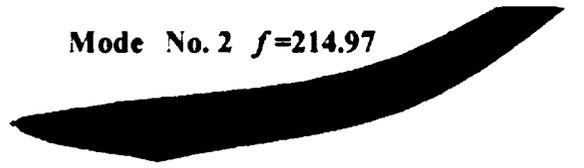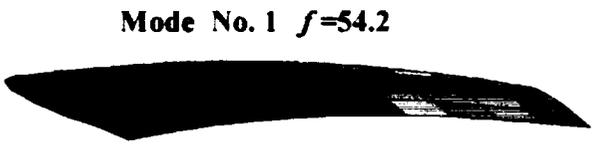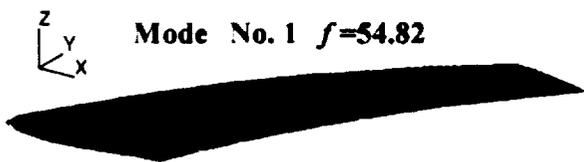


by FEA

Equivalent Plate Model

Fig. 7 Mode Shapes and Natural Frequency  $f$  (rad/s) for a Built-up Wing Composed of Skins, Spars and Ribs

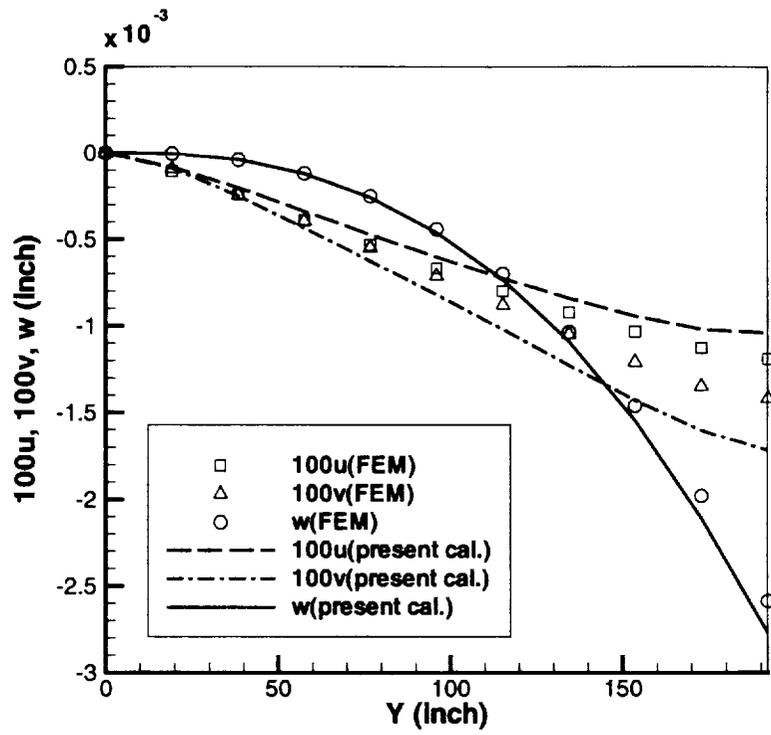


(a) leading edge

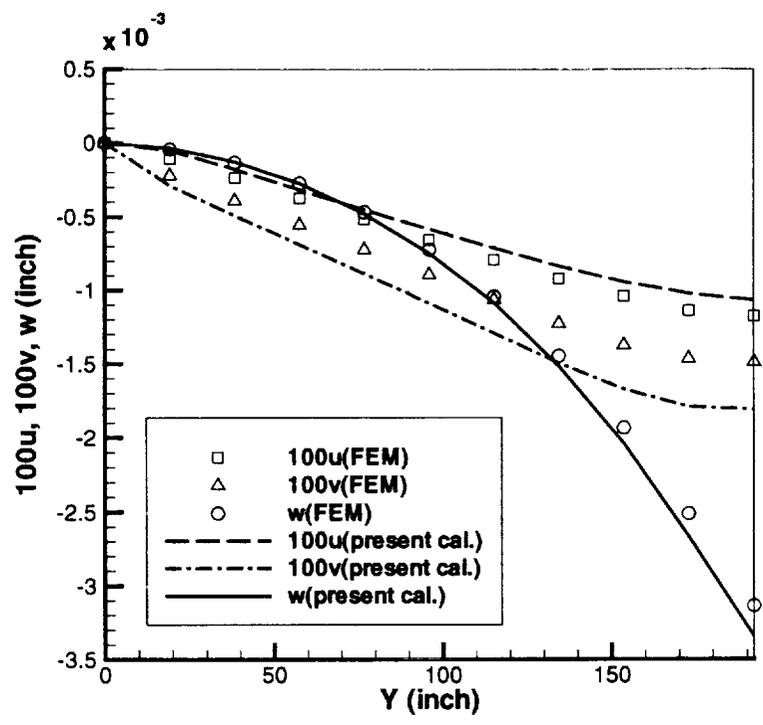


(b) trailing edge

Fig. 8 Comparison of Displacements for Load Case of Tip Point Force

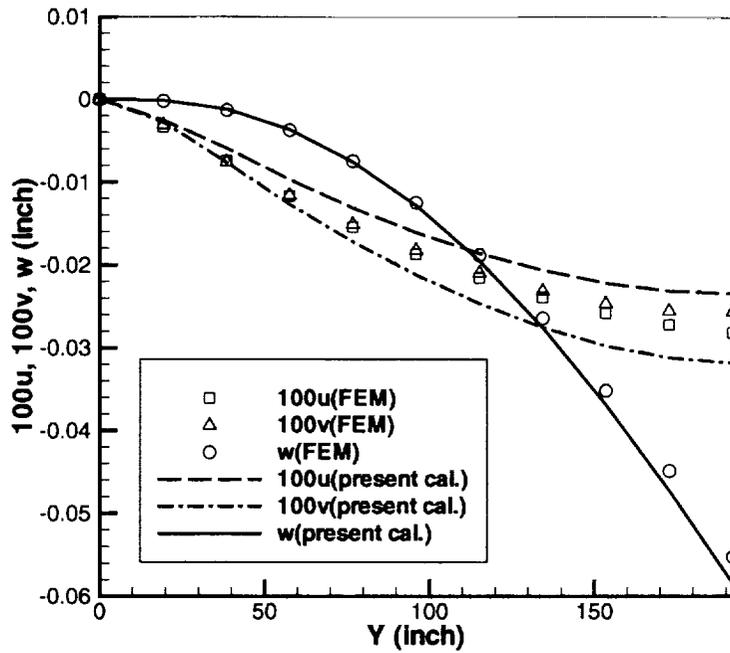


(a) leading edge

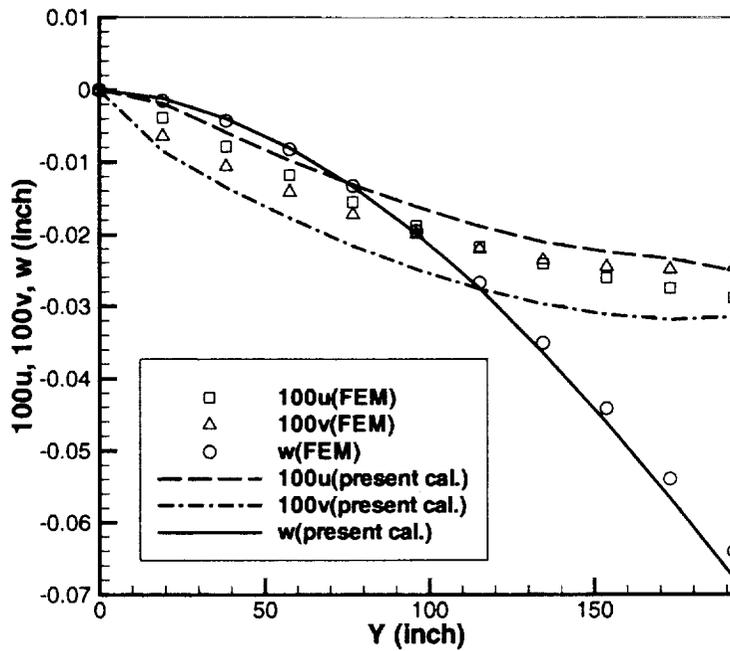


(b) trailing edge

Fig. 9 Comparison of Displacements for Load Case of a Force Distribution

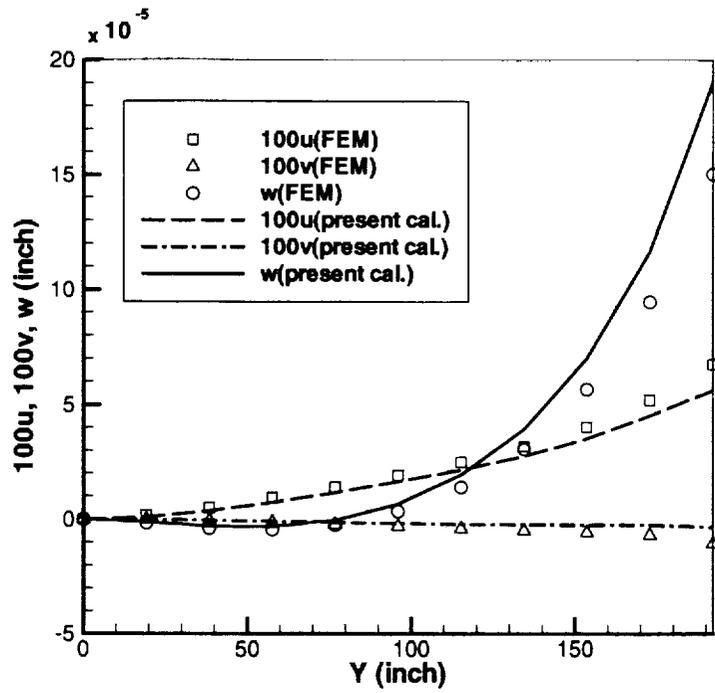


(a) leading edge

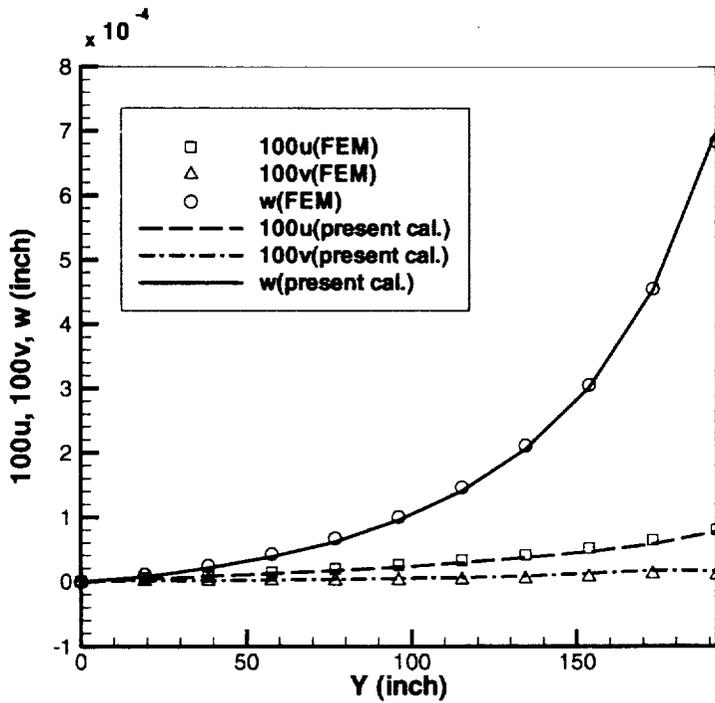


(b) trailing edge

Fig. 10 Comparison of Displacements for Load Case of Tip Torque

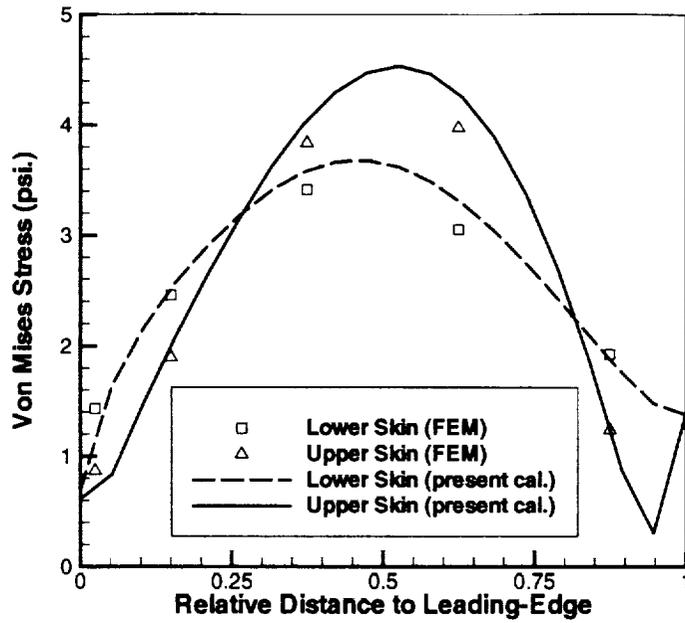

(a) Near the Root Chord

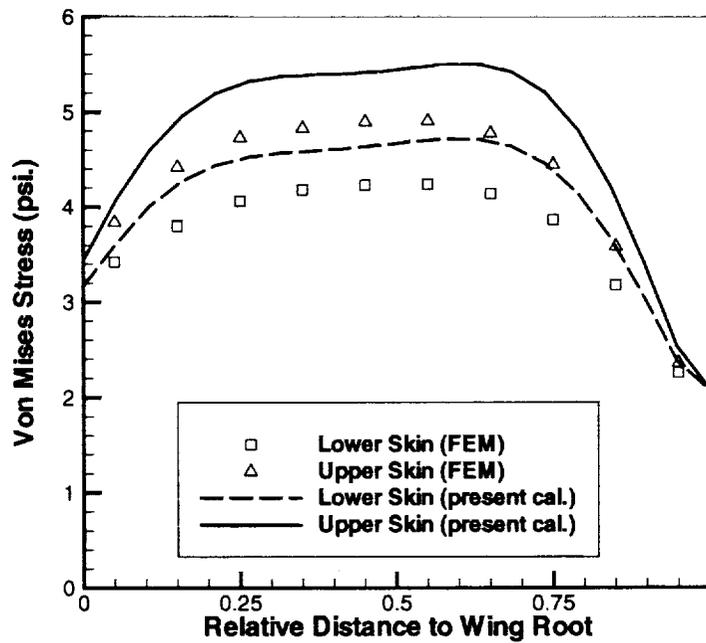

(b) Near the Central Spar

**Fig. 11 Comparison of Von Mises Stress on the Upper and Lower Skins of a Wing under a Point Force at the Wing Tip**

**Fig. 1 The Coordinate System and Its Transformation**

**Fig. 2 Wing Skin**

**Fig. 3 Wing Spar or Rib**

**Fig. 4 Mode Shapes and Natural Frequency  $f$  (rad / s) for a Trapezoidal Plate**

**Fig. 5 Mode Shapes and Natural Frequency  $f$  (rad / s) for Wing-Shaped Shell with a Camber**

**Fig. 6 Mode Shapes and Natural Frequency  $f$  (rad / s) for the Solid Wing**

**Fig. 7 Mode Shapes and Natural Frequency  $f$  (rad / s) for a Built-up Wing Composed of Skin, Spars and Ribs**

**Fig. 8 Comparison of Displacements for Load Case of Tip Point Force**

**Fig. 9 Comparison of Displacements for Load Case of a Force Distribution**

**Fig. 10 Comparison of Displacements for Load Case of Tip Torque**

**Fig. 11 Comparison of Von Mises Stress on the Upper and Lower Skins of a Wing under a Point Force at the Wing Tip**